

## CONVEYORS & TABLES

The PackRite line of conveyors is designed to move bags in conjunction with weighing, filling, sealing, packing and other related production operations. D.C. Variable speed provides versatile control over productivity, with a maximum speed of 750 i.p.m. on the highest speed range.

Feed directions of either left to right or right to left are offered to match existing production flow. Belt height from floor is a standard 30" with optional heights available. Because the conveyors are sectionalized they can be provided in length from 8' to 40' to meet plant installation requirements.

The conveyor's all-metal construction ensures sturdy support for long-lasting service. Design quality and simplicity help keep maintenance requirements to a minimum.

All of our conveyors have neoprene food-grade, water resistant belting that will carry light to heavy loads without slipping. Belt tension is easily adjusted by turning two screws. The Stainless Steel Convey-Master Conveyor is USDA approved and designed for meat, poultry, seafood and produce applications.

The Conveymaster conveyor is designed for the moving of dry goods and agricultural applications.

The Flat Topper conveyor is designed to run product in the horizontal mode. It can also be equipped to run product in the vertical mode.


See reverse side for complete list of specifications.



Stainless Steel Convey-Master Conveyor  
Pictured with Model 6000 Band Sealer



Flat Topper Conveyor with Bag Guide and Bag Rail

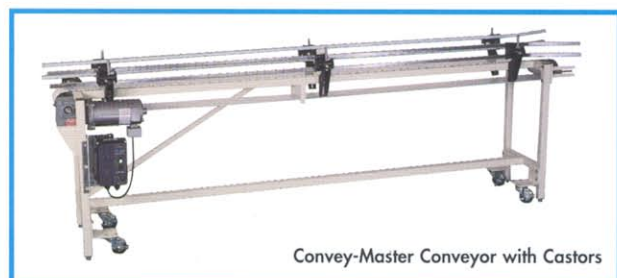

Convey-Master Conveyor with Castors

## SPECIFICATIONS... ALL CONVEYORS

- **Feed direction:** Right to left, or left to right (set at factory)
- **Speed range:** Up to 750 i.p.m. D.C. Variable speed drive
- **Belt height:** From floor to belt 30"
- **Electrical:** 115 volts, 60/50 cycle, 1 phase, A.C.
- **Conveying belts:** USDA approved, food grade, water resistant
- **Leveling feet:** 2" adjustment
- **Conveying section lengths:** 8' (9' OAL) and 16' (17' OAL)

## OPTIONS... ALL CONVEYORS

- **Electrical:** 230 volts, 60/50 cycles. 1 phase, A.C.
- **Special heights**
- **Special lengths**
- **Castors:** USDA approved, 4 swivel with brakes
- **Sealer/Conveyor Caddie:** Allows 8' sections of Convey-Master or stainless steel Convey-Master to be centered, leveled and moved with Model 6000/BANDRITE Band Sealer to be moved as one unit.

## STAINLESS STEEL CONVEYMASTER

### FEATURES

- **Stainless steel construction:** USDA approved
- **Adjustable guide rails with nylon inserts:** Easily adjusted without tools, total of 4 per section
- **Conveying belt width:** 6" wide

## OPTIONS

- **Extra sets of guide rails:** to support large bags

### Weights & Dimensions

8' section: 350 lbs. 118"L x 30"W x 42"H

16' section: 500 lbs. 118"L x 41"W x 42"H

All weights and dimensions are approximate.

## CONVEYMASTER

### FEATURES

- **Mild steel construction :** With almond powder coating
- **Adjustable guide rails with nylon inserts:** Easily adjusted without tools, total of 4 per section
- **Belt width:** 6" wide

## OPTIONS

- **Extra sets of guide rails:** to support large bags

### Weights & Dimensions

8' section: 350 lbs. 118"L x 30"W x 42"H

16' section: 500 lbs. 118"L x 41"W x 42"H

All weights and dimensions are approximate.

## FLAT TOPPER CONVEYOR

### FEATURES

- **Mild steel construction :** With almond powder coating
- **Belt width:** 12" wide, designed for running bags horizontally

## OPTIONS

- **Bag feeding guide:** For repeatability of feeding bags into sealer
- **Bag feeding rail:** For feeding flat bags into Model 6000/BANDRITE band sealer in the horizontal mode
- **Adjustable guide rails:** Allows bags to be run vertically

### Weights & Dimensions

8' section: 370 lbs. 118"L x 30"W x 38"H

16' section: 540 lbs. 118"L x 42"W x 38"H

All weights and dimensions are approximate.

For quotation or more information,  
**CALL TOLL FREE: 1-800-248-6868**  
**1-262-635-6966 or FAX: 1-262-634-0521**  
PackRite / 3026 Phillips Ave / Racine, Wisconsin 53403-3517

*"A Tradition Of Quality Since 1938."*