

ROTARY ACCUMULATING TABLE

CONVEYORS AND TABLES

The PackRite Rotary Accumulating Table is designed to collect the overflow from a packaging production line to keep your operation running smoothly. The 48-inch diameter formica table top provides ample space for package collection. It rotates three complete counterclockwise turns per minute, and allows personnel the necessary "time out" for packing without stopping the production.

The Rotary Accumulating Table is ideal for collecting

bags, cartons, boxes, tubes and other packing materials. Height is adjustable from 28 to 41 inches (from the floor), so it fits right in with other packaging production line equipment.

Smooth, effortless rotation is assured by the needle thrust bearing. A vertical mounting hub welded onto a steel plate is bolted to the table top to assure stability of the table during use.

For complete list of specifications, see reverse side.



CONVEYORS AND TABLES

Standard: 48"-diameter formica table top.
Speed: 3 RPM, counterclockwise.
 (Optional speeds available.)
Capacity: Bags, cartons, boxes, tubes and other packing materials.
Height From Floor: Adjustable from 28" to 41".
Motor Output Torque: 50"/lb.
Load Limit Test: Continuous ammeter test shows NO MOTOR OVERLOAD with distributed load up to 500 lbs.
Shipping Weight: 35 lbs. (Table Top).
 100 lbs. (Base).

Shipping Dimensions: 50"L x 54"W x 2"H (Table Top).
 32"L x 24"W x 24"H (Base).
OPTIONS (Up charge)

- Carton Holder Arm with 14" vertical adjustment.
- Package Guide Arm keeps packages toward center of table.
- Table Top diameters other than 48" quoted on request.
- Speeds other than 3 RPM quoted on request.
- Outside Rim Lip to prevent packages from falling off table.


48"-Diameter Formica Table Top will collect as much as 500 lbs. of packages from production line overflow.

Optional Carton Holder Arm adjusts vertically 14 inches; quoted on request.

12' Heavy-Duty Cord with standard 3-prong plug for safety and durability.

12 RPM Gear Reduction Motor with an enclosed positive chain drive that actuates vertical drive shaft.

Adjustable Height from 28" to 41" (floor to table top).

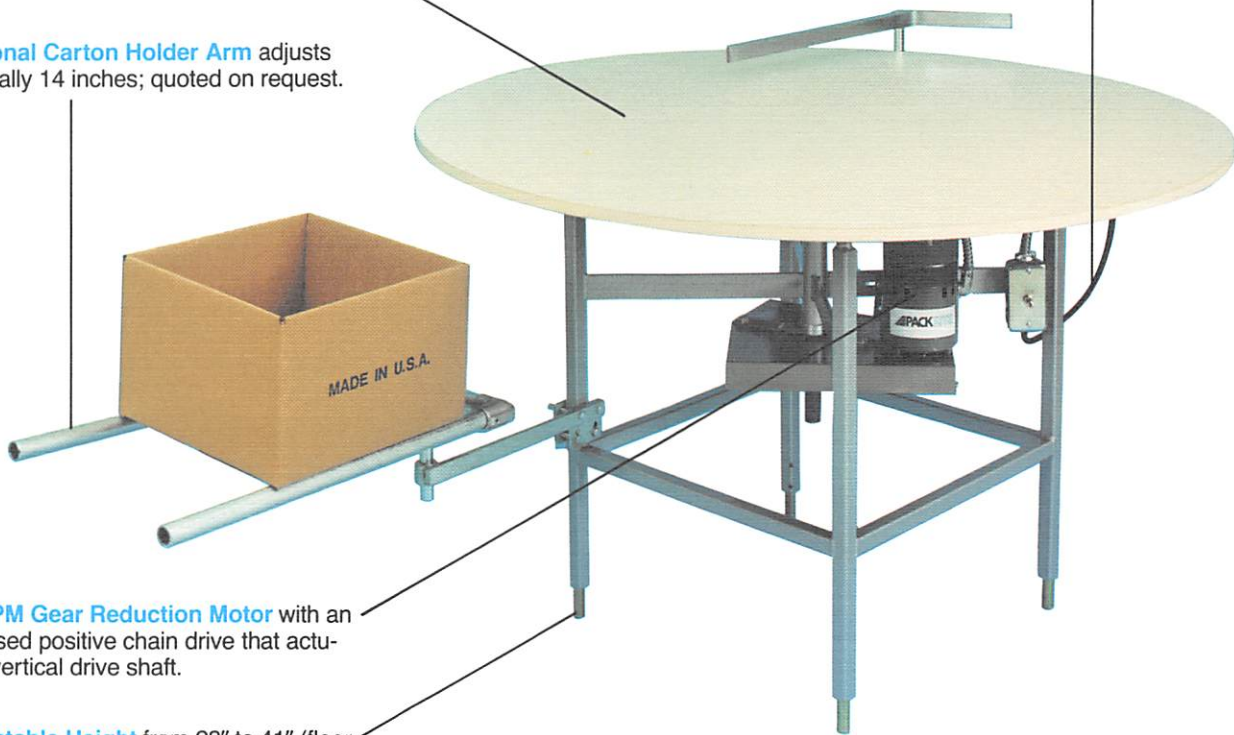

For quotation or more information,
CALL TOLL FREE: 1 800 248-6868. In Wisconsin, call (414) 886-6868.

©1987 Reliance Electric Company

PackRite / 3817 Nicholson Road / Franksville, Wisconsin 53126